



PRODUCT MATERIAL	Aluminium
LIGHT SOURCE	Bridgelux
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	45°
ADJUSTABLE	Yes
SIZE	Ø85 X 28mm





OPTIONS

DRIVER OPTIONS	1/10V 250mA 4-15W Art. no.: 0115.250.30.0 Max. 3 fixtures connected in serie per driver
	DALI 250mA 4-10W Art. no.: 0110.250.40.2 Max. 2 fixtures connected in serie per driver

INFORMATION

Allow for extra space behind recessed frame to install driver

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

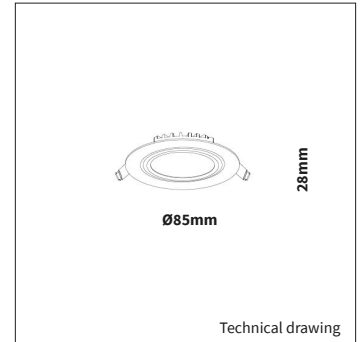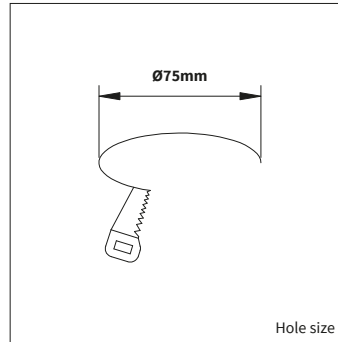

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4290.300.45.Δ	BR.V6	Bridgelux	450lm	5W	90lm/W	2000-3000K	>80	50.000 Hrs	250mA

Δ See colors